

3dBi 2.4G Dipole Rod Antenna

FEATURES



- PCB Antenna
- 3dBi Peak Gain, Omnidirectional



The MyAntenna M02-0600280R0A M02-0600290R0A range of antennas are designed to decrease the lifetime cost of M2M and mobile device installations by offering a robust, effective antenna that is easy to install and lasts the lifetime of the installation without the need for maintenance.

PRODUCTS

Part No.	Weight	Dimensions (L x W x H)	Connector	Color
M02-0600280R0A	22g	Φ13*195mm	RP-SMA-Male	Black
M02-0600290R0A	22g	Φ13*195mm	SMA-Male	Black

SPECIFICATIONS



PARAMETER	SPECIFICATION
Frequency Bands, MHz	2400-2500
VSWR (Max)	3.0:1
Peak Gain, dBi (Typ)	Up to 4.2
Nominal Impedance	50 Ω
Max Power (ambient temp of 25°C)	10 Watts
Azimuth Beam Width (deg)	Omnidirectional
Polarization	Linear, Omnidirectional
Radome	PC, Black
Storage Temperature Range (°C)	-40° C to +85° C
Operational Temperature Range (°C)	-30° C to +80° C
Material Substance Compliance	REACH/RoHS Compliant
HSCODE	8517707090
USHSCODE	8517620010
UPC	

MyAntenna RF Technology Co., Ltd

ADD:Room 410, Building A, Fenghuang Zhigu, No. 50 Tiezi Road, Gongle Community, Xixiang Street, Baoan District, Shenzhen, China.

TEL: +86-0755-86503881 FAX: +86-0755-27801677 E-mail: nfc@myantenna.com

ELECTRICAL DATA

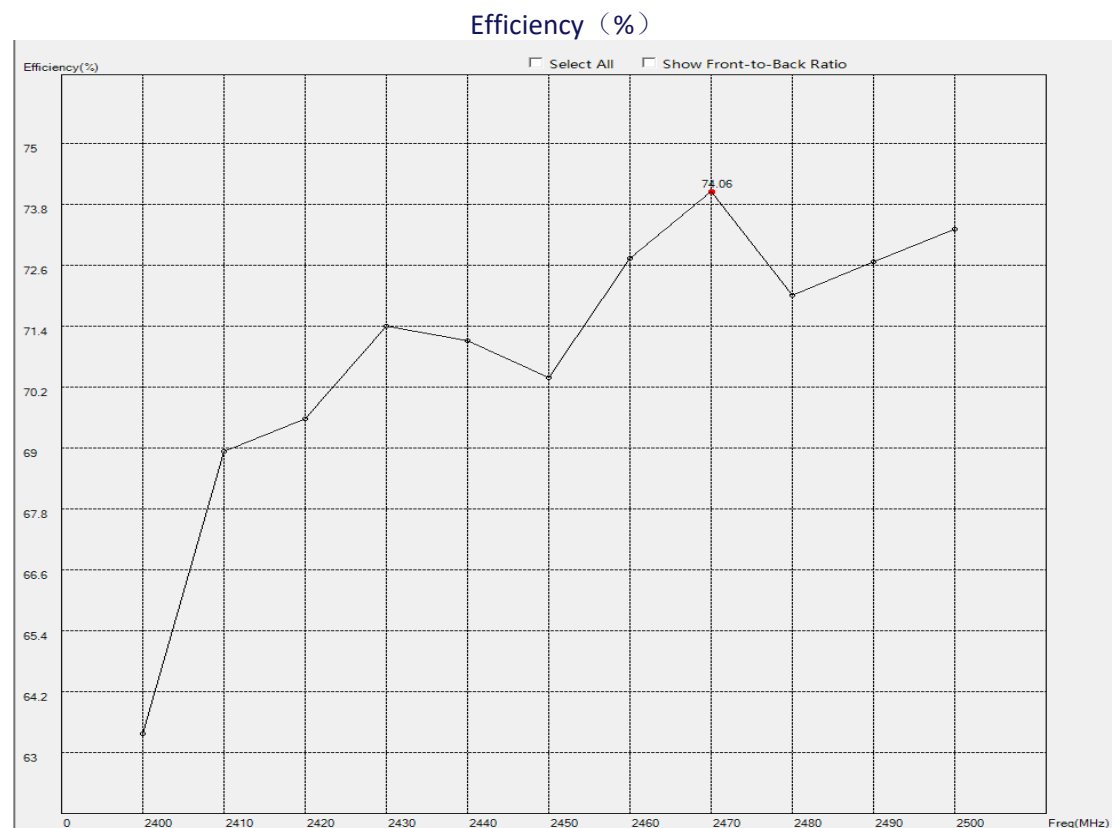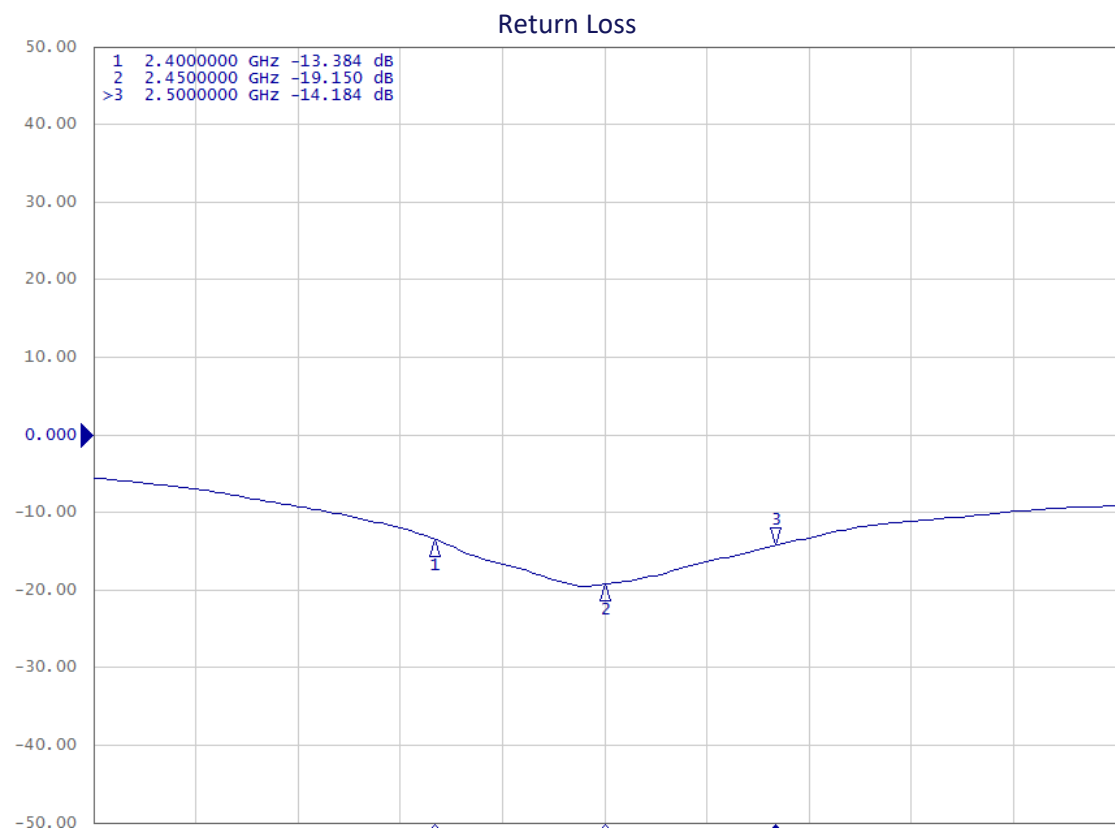


MyAntenna RF Technology Co., Ltd

ADD: Room 410, Building A, Fenghuang Zhigu, No. 50 Tiezi Road, Gongle Community, Xixiang Street, Baoan District, Shenzhen, China.


TEL: +86-0755-86503881 FAX: +86-0755-27801677 E-mail: nfc@myantenna.com

Peak Gain (dBi)

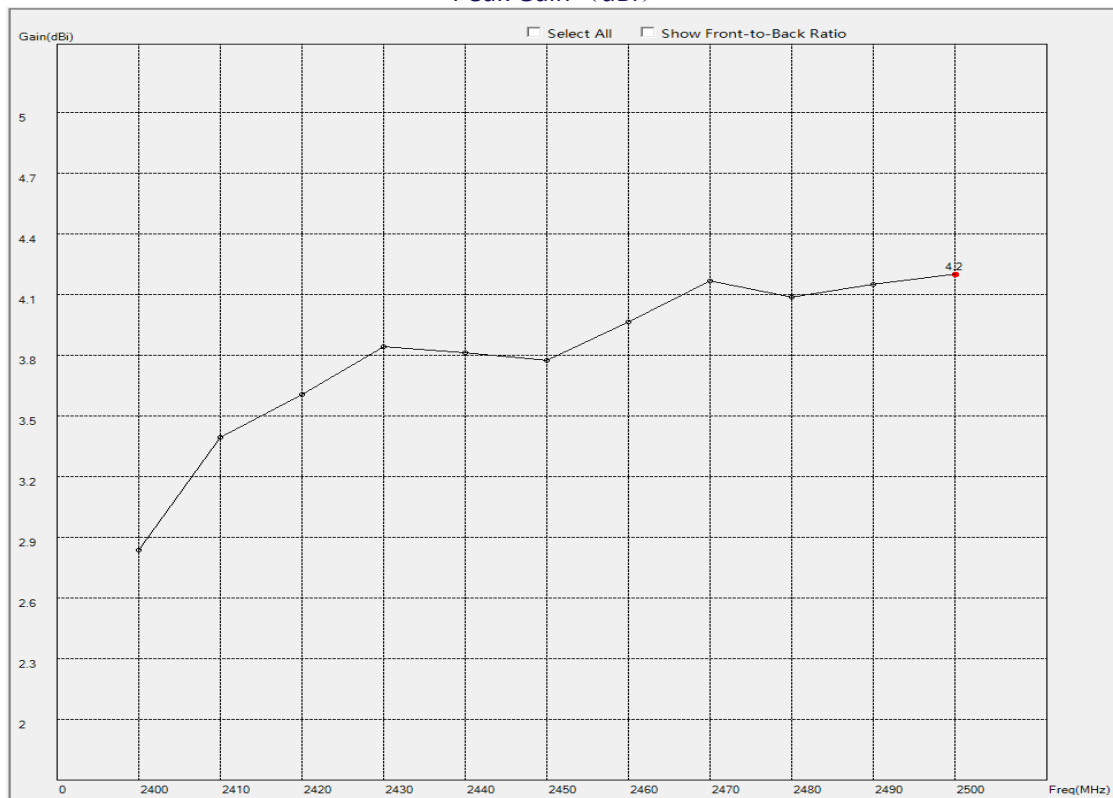


RADIATION PATTERNS

2D Radiation Pattern at 2450MHz

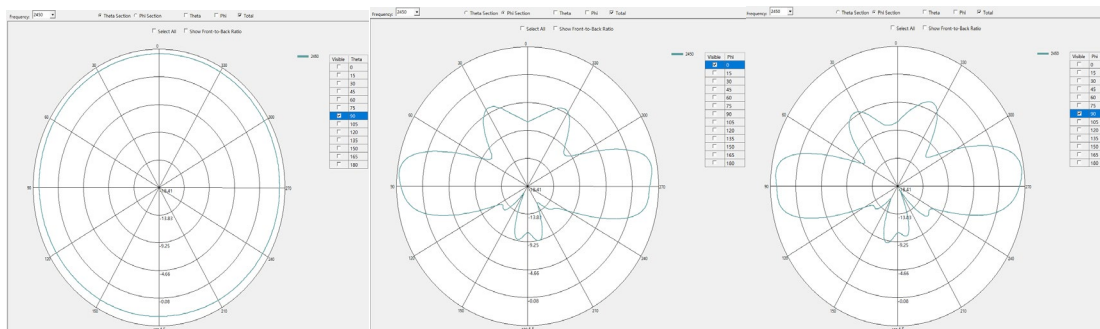

HOUSING CONFIGURATIONS

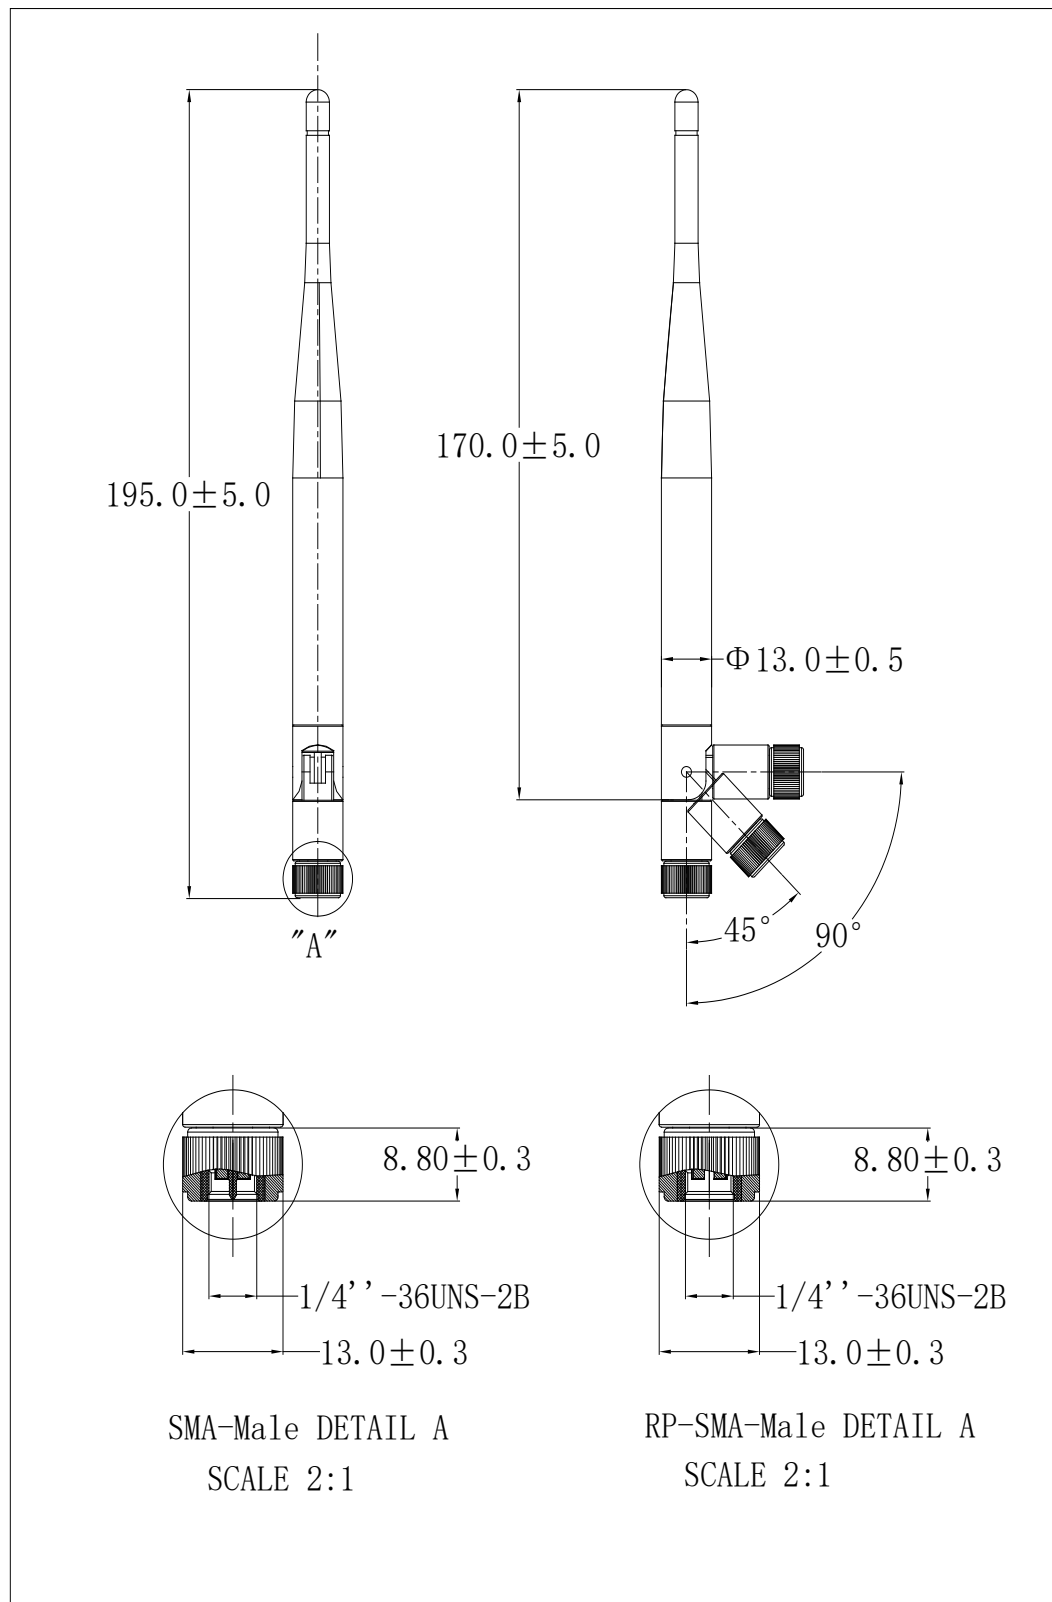

AboostyTM is owned by Shenzhen MyAntenna RF Technology Co., Ltd. (often abbreviated as MyAntenna).