天线产品尺寸图

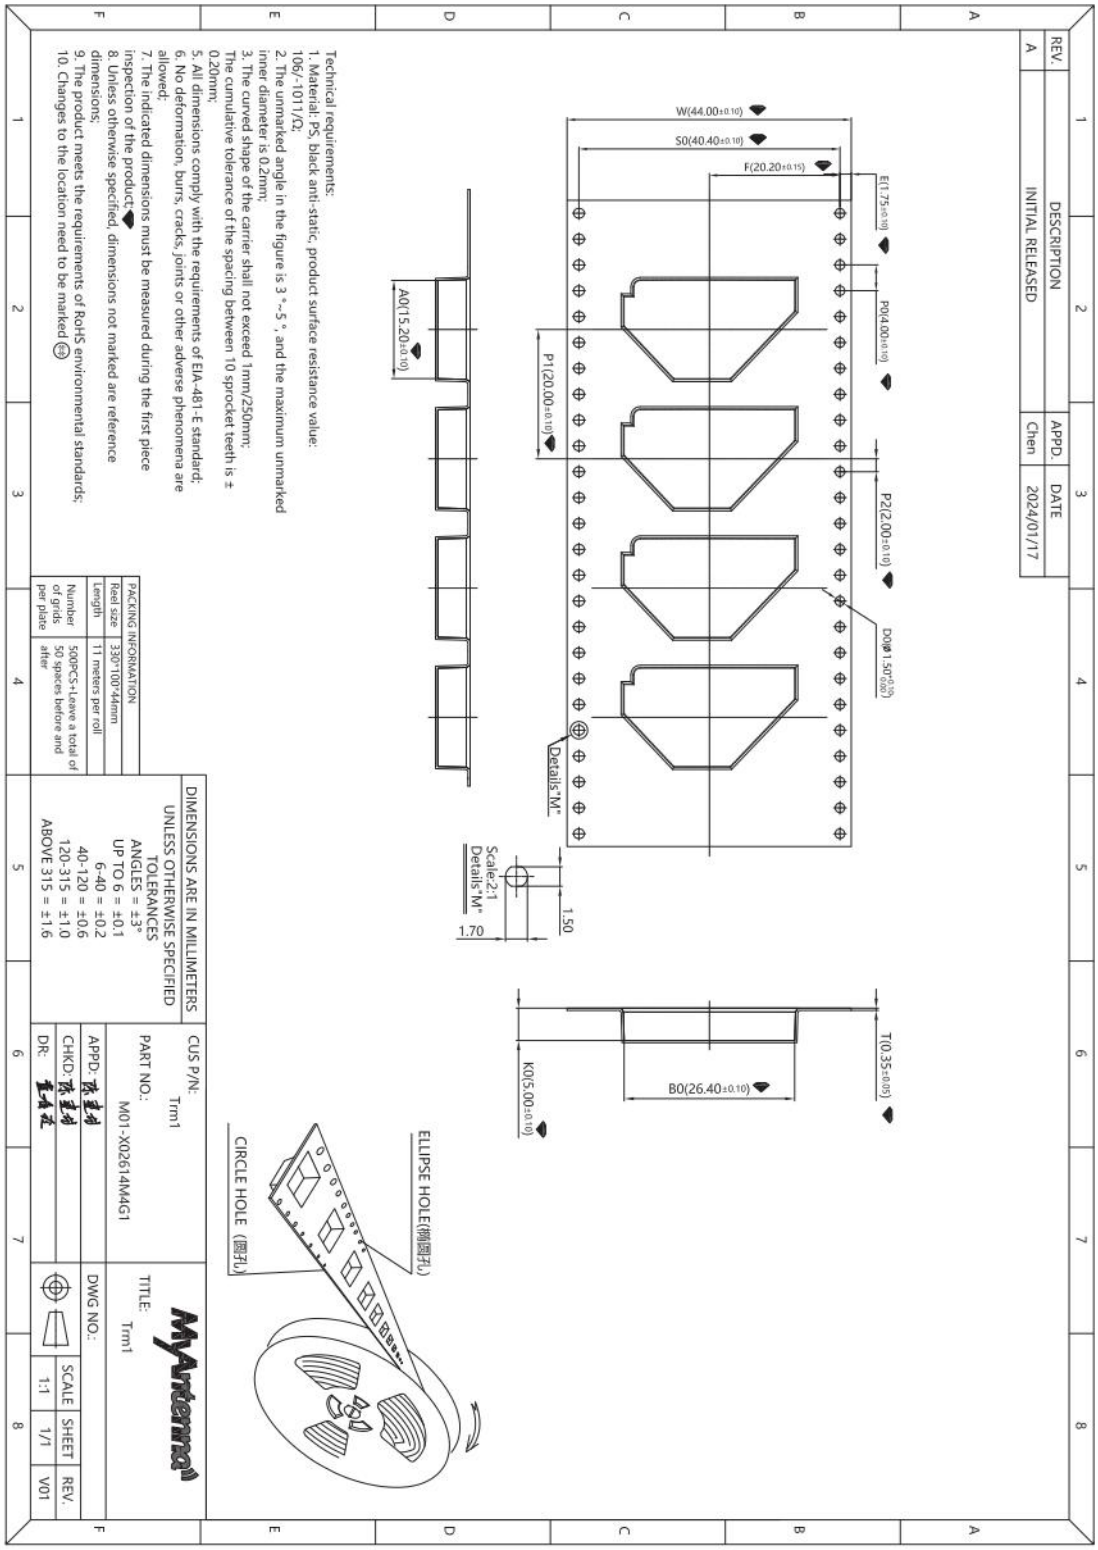
REV.
A
DESCRIPTION
INITIAL RELEASED
APPD.
Chen
DATE
2024/01/17
W(44.00±0.10)
S0(40.40±0.10)
F(20.20±0.15)
E(1.75±0.10)
P0(4.00±0.10)
P1(20.00±0.10)
P2(2.00±0.10)
D0(φ1.50+0.10 0.00)
Details"M"
A0(15.20±0.10)
Scale:2:1
Details"M"
1.50
1.70
T(0.35±0.05)
B0(26.40±0.10)
K0(5.00±0.10)
ELLIPSE HOLE(椭圆孔)
CIRCLE HOLE (圆孔)
Technical requirements:
1. Material: PS, black anti-static, product surface resistance value: 10^6/~10^11/Ω;
2. The unmarked angle in the figure is 3 °~5 °, and the maximum unmarked inner diameter is 0.2mm;
3. The curved shape of the carrier shall not exceed 1mm/250mm;
The cumulative tolerance of the spacing between 10 sprocket teeth is ± 0.20mm;
5. All dimensions comply with the requirements of EIA-481-E standard;
6. No deformation, burrs, cracks, joints or other adverse phenomena are allowed;
7. The indicated dimensions must be measured during the first piece inspection of the product;
8. Unless otherwise specified, dimensions not marked are reference dimensions;
9. The product meets the requirements of RoHS environmental standards;
10. Changes to the location need to be marked
PACKING INFORMATION
Reel size 330*100*44mm
Length 11 meters per roll
Number of grids per plate 500PCS+Leave a total of 50 spaces before and after
DIMENSIONS ARE IN MILLIMETERS
UNLESS OTHERWISE SPECIFIED
TOLERANCES
ANGLES = ±3°
UP TO 6 = ±0.1
6-40 = ±0.2
40-120 = ±0.6
120-315 = ±1.0
ABOVE 315 = ±1.6
CUS P/N:
Trm1
PART NO.:
M01-X02614M4G1
MyAntenna
TITLE:
Trm1
APPD:
CHKD:
DR:
DWG NO.:
SCALE
1:1
SHEET
1/1
REV.
V01